



PROXIMITY SENSOR INTERFACE

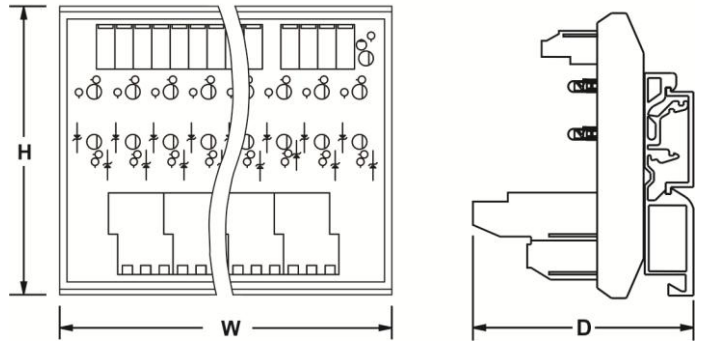

Dimensions

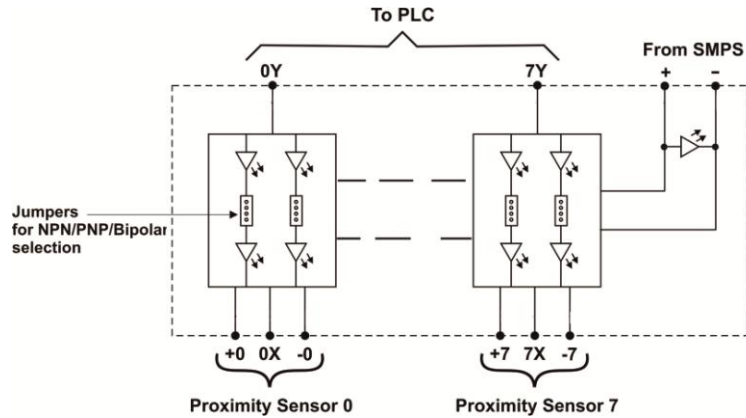

Wiring Diagram

Note: Default jumper setting for PNP indication.

FEATURES	<ul style="list-style-type: none"> Grouping of Terminals for PLC Connections Grouping of Terminals for Sensor Connections Common Power Supply Connections PNP, NPN or Bipolar Indication By Jumpers 35mm DIN Rail Mountable
OPERATING AMBIENT	0-55°C, 85% RH
STORAGE AMBIENT	-20°C to 85°C
TERMINATIONS	Screw type, for 2.5mm sq. wire
MOUNTING	35 mm DIN rail

AS445, -24V					
ORDERING INFORMATION	NO. OF CHANNELS	DESIGN NO.	INPUT VOLTAGE	DIMENSIONS W x H x D (mm)	WEIGHT (MAX)
	1	AS441	12V : 12VDC, 10-14VDC 24V : 24VDC, 20-28VDC	25 x 80 x 70	70 grams
	2	AS442		45 x 80 x 70	90 grams
	4	AS443		70 x 80 x 70	110 grams
	8	AS445		90 x 80 x 70	170 grams