

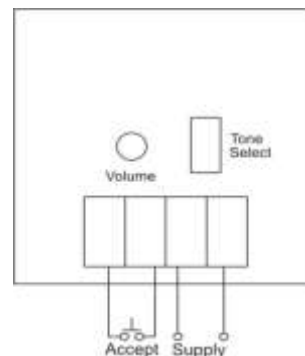
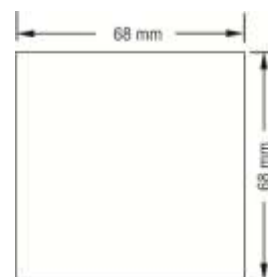


# HOOTER – 72x72mm

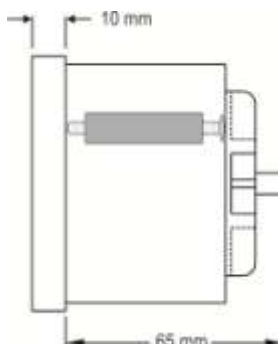

**Terminal Connection**

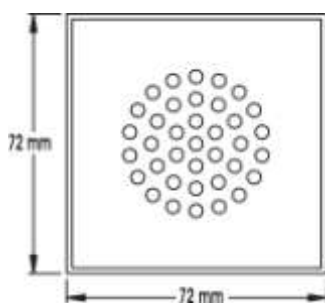

**Panel Cutout**

All Dimensions in mm

ORDER CODE	H72S – 110AC	H72S – 230AC	H72S – 24DC
SUPPLY VOLTAGE	110V AC $\pm 15\%$ , 50 / 60Hz	230V AC $\pm 15\%$ , 50 / 60Hz	24V DC $\pm 15\%$
INRUSH CURRENT	1.6A , 20ms	3.2A , 20ms	250mA
POWER CONSUMPTION	6VA / Watt Max.		
ACCEPT FACILITY	Terminals on back (to be used with potential free contacts for hooter mute/reset. Once it's reset, make aux supply on & off to restart hooter).		
RESET TIME	Less than 1 Sec		
TONES	2 Tone		
tone SELECT SWITCH	Present on rear		
VOLUME CONTROL	Present on rear		
AUDIO LEVEL	110db $\pm 10\%$		
OPERATING AMBIENT	0~55°C		
STORAGE AMBIENT	-20°C to 85°C		
HUMIDITY	95% RH non condensing		
MOUNTING	Flush at front (Panel Mounting)		
DIMENSIONS	Overall : 72 x 72 x 65 mm Cutout : 68 x 68mm $\pm 0.5$ , -0.0		
TERMINALS	Suitable for 2.5 mm <sup>2</sup> wire		
WEIGHT	190gms		